

NPK Service Bulletin


SB16-2

SUBJECT: COMPACTOR PRE-DELIVERY INSPECTION

MODEL(S): ALL MODELS

Model _____ Serial Number _____ Date _____

Verify Items Noted Below Prior To Delivery

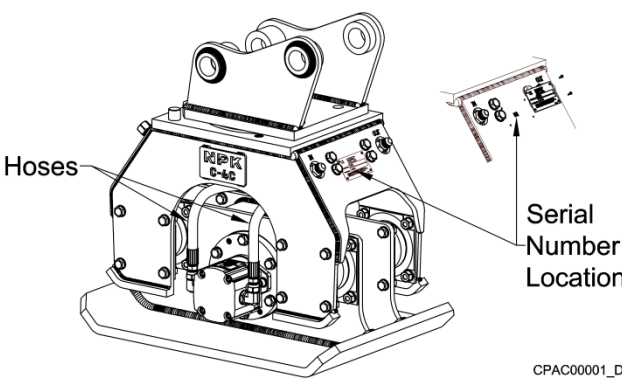


Hoses

Serial Number Location

CPAC00001_D

Verify hydraulic hoses between the motor and manifold are tight.

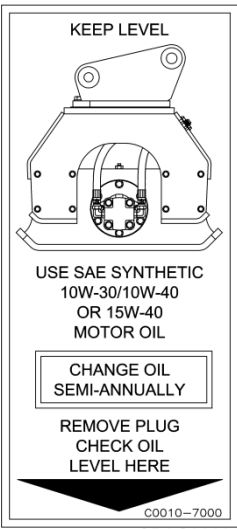

KEEP LEVEL


USE SAE SYNTHETIC
10W-30/10W-40
OR 15W-40
MOTOR OIL

CHANGE OIL
SEMI-ANNUALLY

REMOVE PLUG
CHECK OIL
LEVEL HERE

C0010-7000

CPAC00021

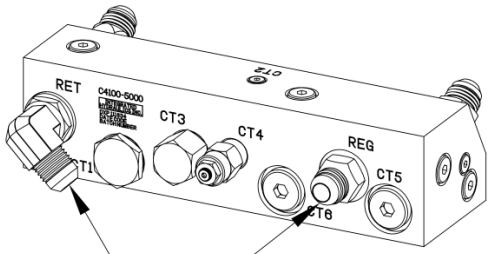


RET C4100-5000 CT3 CT4 REG CT5 CT8

Fittings

CPAC10071_D

Verify manifold fittings are tight.

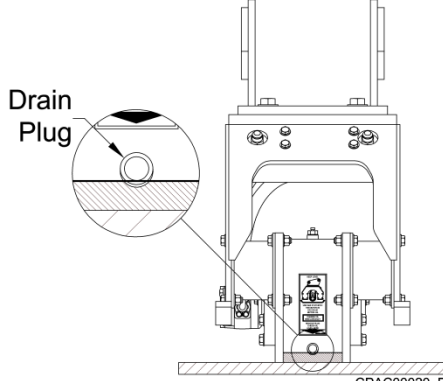

Drain Plug

CPAC00020_D

Place compactor on level flat surface. Remove drain plug, oil should be touching the bottom of drain port.

Carrier hydraulic circuit needs to be tested for correct flow (GPM) and return line back pressure. **Return line flow should go straight back to the carrier's tank and pressure should not exceed 150 psi.**