



Demolition Grabs

Simplify Your Demolition and Sorting

Multipurpose Tool that Increases Demolition Efficiency

Full 360° Hydraulic Rotation

Comprehensive Dealer Network Providing Sales, Parts and Service, and Backed by the Industry's Best Support!



NPK ATTACHMENTS DESIGNED, BUILT & BACKED BY NPK

Demolition Grabs


Specifically Designed to Reduce the Cost of Dismantling, Sorting and Recycling

SPECIFICATIONS

NPK Model	Recommended Carrier Weight (lb-metric tons)	Weight* (lb-kg)	Capacity (Volume) (yd ³ -L)	Operating Pressure (psi-bar)	Oil Flow (gpm-lpm)	Closing Force (lbf-kN)	Rotation		Dimensions (Refer to illustration below)		
							Operating Pressure (psi-bar)	Oil Flow (gpm-lpm)	A (in-mm)	B (in-mm)	C (in-mm)
DG-16	22,000 - 35,000 lb 10 - 16 metric tons	1,930 lb 875 kg	0.56 yd ³ 425 L	3,625-5,075 psi 250-350 bar	16 - 26 gpm 60 - 100 lpm	10,790 lbf 48 kN	1,450-2,030 psi 100-140 bar	5-8 gpm 20-30 lpm	72.8 in 1,850 mm	48.6 in 1,235 mm	34 in 860 mm
DG-20A	31,000 - 44,000 lb 14 - 20 metric tons	2,755 lb 1,250 kg	0.65 yd ³ 500 L	3,625-5,075 psi 250-350 bar	16 - 26 gpm 60 - 100 lpm	11,690 lbf 52 kN	1,450-2,030 psi 100-140 bar	8-13 gpm 30-50 lpm	80.7 in 2,050 mm	51.2 in 1,300 mm	37 in 950 mm
DG-25	35,000 - 57,000 lb 16 - 26 metric tons	3,200 lb 1,450 kg	0.78 yd ³ 600 L	3,625-5,075 psi 250-350 bar	16 - 26 gpm 60 - 100 lpm	11,690 lbf 52 kN	1,450-2,030 psi 100-140 bar	8-13 gpm 30-50 lpm	85 in 2,160 mm	52 in 1,330mm	44 in 1,115 mm
DG-30A	40,000 - 66,000 lb 18 - 30 metric tons	4,080 lb 1,850 kg	1.05 yd ³ 800 L	3,625-5,075 psi 250-350 bar	21 - 32 gpm 80 - 120 lpm	16,185 lbf 72 kN	1,450-2,030 psi 100-140 bar	8-13 gpm 30-50 lpm	94.9 in 2,410 mm	58.6 in 1,490 mm	44 in 1,115 mm
DG-40A	55,000 - 88,000 lb 25 - 40 metric tons	4,520 lb 2,050 kg	1.18 yd ³ 900 L	3,625-5,075 psi 250-350 bar	21 - 32 gpm 80 - 120 lpm	16,185 lbf 72 kN	1,450-2,030 psi 100-140 bar	8-13 gpm 30-50 lpm	94.9 in 2,410 mm	58.6 in 1,490 mm	54 in 1,360 mm
DG-50	77,000 - 110,000 lb 35 - 50 metric tons	5,510 lb 2,500 kg	1.44 yd ³ 1,100 L	3,625-5,075 psi 250-350 bar	26 - 37 gpm 100 - 140 lpm	20,230 lbf 90 kN	1,450-2,320 psi 100-160 bar	8-13 gpm 30-50 lpm	96.5 in 2,450 mm	61 in 1,560 mm	57 in 1,450 mm

Specifications reflect standard configurations; single motor DG-16 and double motor DG-20A, DG-25, DG-30A, DG-40A and DG-50.

*Weight does not include mounting bracket. Specifications subject to change without notice.

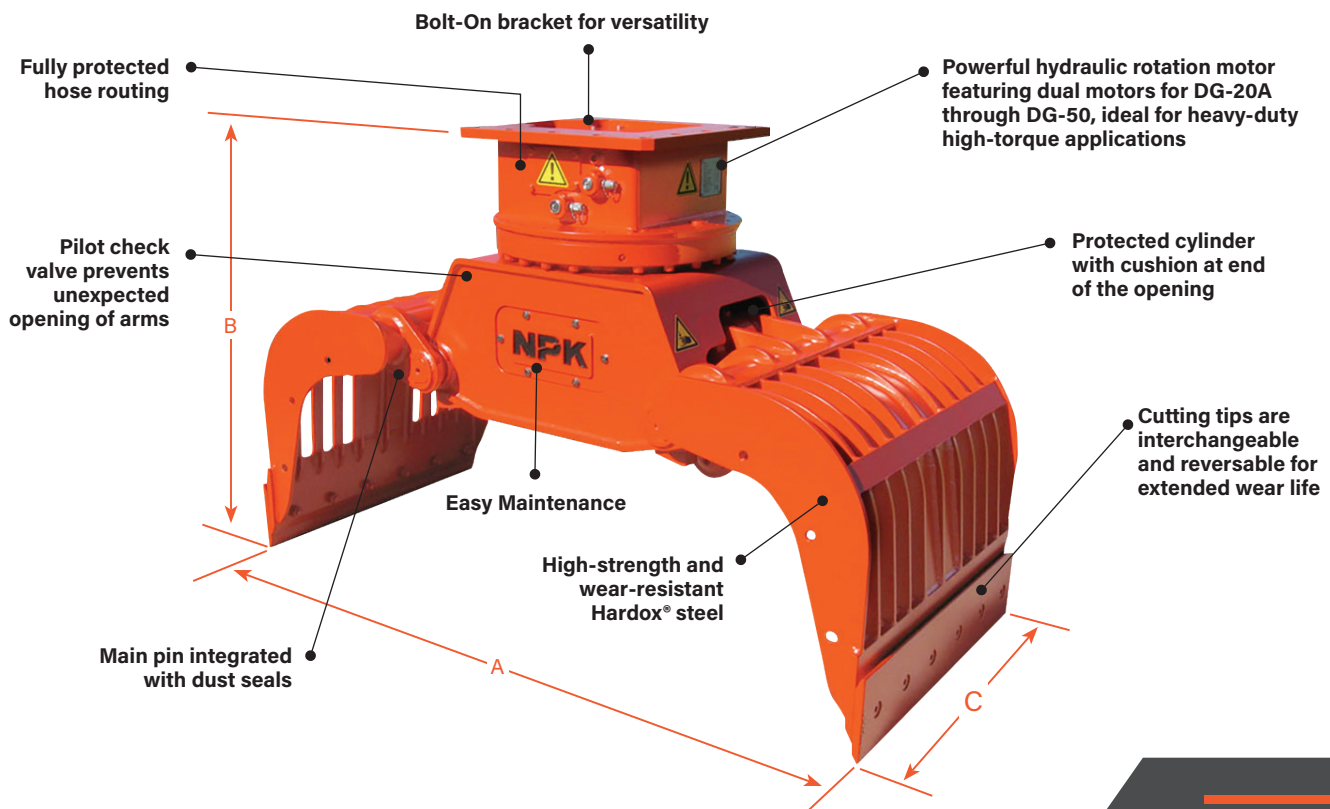

Each product sold by NPK is subject to an express written warranty. NPK makes no other warranty, express or implied, including any warranty of merchantability or fitness for any particular purpose. NPK is not liable for any incidental or consequential damages.

Printed in U.S.A. Form No. B10-0100 (04/24)
© 2024, NPK Construction Equipment, Inc.



Scan for more information on Demolition Grabs



NPK Construction Equipment, Inc.

7550 Independence Drive
Walton Hills, OH 44146-5541

Phone (440) 232-7900

npkce.com